


LSOH SINGLE BOLT CABLE CLEAT

- » Single piece design suitable to fix power cables in indoor and outdoor applications.
- » The curvature of the cleat mounting surface is appropriate for cable diameters 10mm to 51mm.
- » Designed to assure cable retention and support, without causing damage or deformation to the cable.
- » Excellent resistance to ultraviolet and weather.

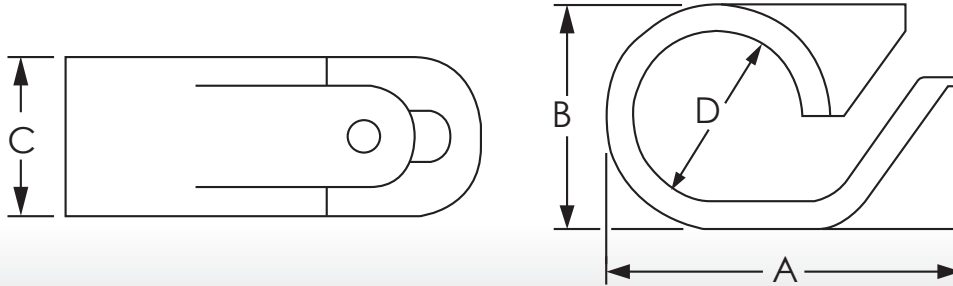

SPECIFICATIONS

Standard
Cable Type
Material
Continuous Operating Temperature
Current Rating

BS EN 50368
 Designed for all types of cables
 Low Smoke Zero Halogen Polymer
 -40°C to +60°C
 Recommended upto 1KVA

TECHNICAL AND ORDERING DATA



Part #	Cleat Details				Cable Diameter 'D'	
	B		A	C	Min	Max
	Min	Max				
DB-01:SCUL	15	18	32	12	10.5	14.5
DB-02:SCUL	17	22	36	14	12.2	16.7
DB-03:SCUL	21	26	43	16	14.6	19.8
DB-04:SCUL	25	31	51	18	17.7	24
DB-05:SCUL	30	37	57	20	21.7	28.5
DB-06:SCUL	35	43	65	22	26.2	34.2
DB-07:SCUL	42	52	78	25	31.9	41.6
DB-08:SCUL	50	62	91	26	39.3	51.1

- » Dimensions are displayed in millimeters unless otherwise stated.
- » Photographs are not a true representation of the product above.

Disclaimer: The dimensions provided are for guidance only and Simplex Cables reserves the right to change these without prior notification. For any critical application please contact the sales office to check the latest data.

LSOH DOUBLE BOLT CABLE CLEAT

- » Two bolt type design suitable for all types of LV cables.
- » The curvature of the cleat mounting surface is appropriate for cable diameters ranging from 50mm to 94mm.
- » Designed to assure cable retention and support, without causing damage or deformation to the cable.
- » Excellent resistance to ultraviolet and weather.

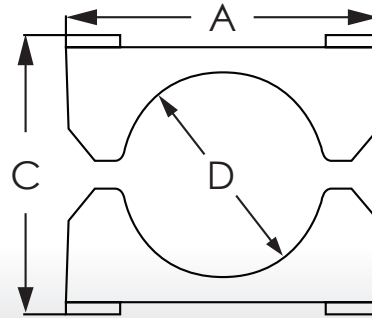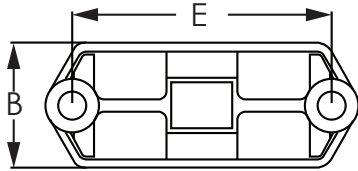

SPECIFICATIONS

Standard
Cable Type
Material
Continuous Operating Temperature
Current Rating

BS EN 50368
 Designed for all types of cables
 Low Smoke Zero Halogen Polymer
 -40°C to +60°C
 Recommended upto 1KVA

TECHNICAL AND ORDERING DATA

PART #	Cleat Details				Cable Diameter 'D'	
	C	A	B	E	Min	Max
DB-01:SCUL	89	102	45	80	50	58
DB-02:SCUL	93	102	45	80	56	64
DB-03:SCUL	98	114	45	92	62	70
DB-04:SCUL	104	114	50	92	68	76
DB-05:SCUL	110	126	50	104	74	82
DB-06:SCUL	118	126	50	104	80	88
DB-07:SCUL	121	136	60	114	86	94

- » Dimensions are displayed in millimeters unless otherwise stated.
- » Photographs are not a true representation of the product above.

Disclaimer: The dimensions provided are for guidance only and Simplex Cables reserves the right to change these without prior notification. For any critical application please contact the sales office to check the latest data.